

**ADI
PRO**

AVARRO™

Capture
by **ADI**

Capture
by **ADI**

UltraTech®
POWER PRODUCTS
by **ADI**

EXCLUSIVE BRANDS



Exclusive to ADI

Our Exclusive Brands deliver the latest technologies for residential and commercial facilities at the highest industry standards.

www.adiglobal.com/uk • 0161 687 8787 • sales.uk@adiglobal.com

ADI | **snap one™**

Always available and in stock, ADI Exclusive Brands offer a wide range of industry leading products to support any installation. Delivering exceptional value and product support, our products meet the highest industry standards and are backed by competitive warranties.

Order any time of day or night, explore products and brands and get hourly stock availability information at your fingertips at:

www.adiglobal.com/uk





Contents

1	Cloud Solutions	6-11
2	Cameras & NVRs	12-15
3	Monitors & Displays	16-20
4	Monitor Brackets	21
5	Residential Audio Video	22
6	Cable & Wire	24-29
7	Cable & Wire - Accessories & Tools	30-31
8	Batteries	32-33
9	Network Switches	34
10	Power Supplies	35-37
11	Access Control	38-40
12	Fire & Emergency Lighting	42-43
13	Intrusion Contacts	44
14	Enclosures, Tools & Hardware	45-49
15	Video Accessories	50



Call

Tech Support: +44 (0) 161 687 8789

UK Sales: +44 (0) 161 687 8787

IE Sales: +353 (0) 1 450 1366



Click

www.adiglobal.com/uk

www.adiglobal.ie

UK: sales.uk@adiglobal.com

IE: dublin.ie@adiglobal.com



Collect

28 Stores across UK & Ireland

Order by 5pm for next day delivery



All our Capture by ADI monitors, cameras and NVRs are carefully chosen to deliver high quality and value. Our exclusive brand offers top performance in small and mid-sized residential and commercial properties.

IP
Cameras

Digital
Displays

NVRs

Camera
Accessories



Cloud Solutions

Powered by **Eagle Eye Networks**

The Capture Cloud by ADI VSaaS is a fully managed cloud video surveillance solution, delivering an end-to-end video management system that's simple to deploy and easy to use. It supports all modern browsers and works on Windows, Mac, even Linux with no plug-ins to install.

Capture Cloud by ADI VSaaS



AVARRO™

AVARRO AV solutions deliver professional grade performance engineered for the toughest applications. Offering superior quality and support for residential and commercial installs to ensure a hassle free experience.

Display
Mounts

HDMI
Cables

HDMI Splitters
& Extenders



**ADI
PRO**

Designed for professionals, ADI PRO products encompass a wide range of categories including wire, cabling solutions, tools and hardware, intrusion, fire and access control.

Wire &
Cable

Tools &
Hardware

Fire

Access
Control

Intrusion



UltraTech®
POWER PRODUCTS
by **ADI**

Durable and dependable, UltraTech by ADI batteries and power products can power alarm systems to safeguard any industrial and residential sector.

SLA
Batteries

Alkaline &
Lithium Batteries

Network
Switches


Power
Supplies



What is the Capture by ADI Cloud Solutions VSaaS?

Capture
by ADI
Cloud Solutions
Powered by **Eagle Eye Networks**

The Capture by ADI Cloud VSaaS is a fully managed cloud video surveillance solution, delivering an end-to-end video management system that's simple to deploy and easy to use. It supports all modern browsers and works on Windows, Mac, even Linux with no plugins to install.




Got Cloud?

Capture by ADI Cloud Solutions VsaaS provides a cloud based, video management system. The Eagle Eye Bridge is installed on-site, connects to your cameras, records video locally, and then securely synchronizes both video and metadata to the Capture by ADI Cloud Solutions Data centre. It's a robust, secure appliance specifically designed to overcome the demands of transmitting high-resolution video through the Internet.

Comprehensive Camera Support

We believe camera compatibility is important. There's no need to be locked into a single camera vendor. Businesses need the flexibility to work with the cameras that they choose. Eagle Eye Bridges support ONVIF Profile S IP cameras. For an up to date list of all compatible cameras visit www.een.com/cameras.



Fully Mobile

View video anytime, anywhere. The fully functional iOS and Android applications provide complete access to live and recorded video and can also be used to install, configure and manage the system.



Worry Free Management

All the software in the Capture Cloud by ADI and firmware on the Eagle Eye Bridge is managed and updated by Eagle Eye Networks. The hardware is fully backed by a 2 year warranty.


Security Simplified

With Eagle Eye Complete Privacy Encryption, video is fully encrypted during transmission and at rest. The Eagle Eye Bridge has no open ports to the Internet, eliminating security vulnerabilities commonly found in other systems and requiring no router or firewall adjustments.



Eagle Eye Compact Bridge 304+

The Eagle Eye Bridge acts as a gateway from your premises to the Capture by ADI Cloud Solutions Data Centre where your video is stored and managed by the Capture by ADI Cloud VSaaS. It provides a secure connection, video buffering, bandwidth management, and monitoring of cameras. These small form factor bridges are suitable for applications up to 20 cameras when a server rack is not available. They can be wall or shelf mounted. This family of bridges are equipped with hard wearing, aluminum enclosures designed to operate in a broad ambient temperature range and include a display screen providing operational status at a glance.

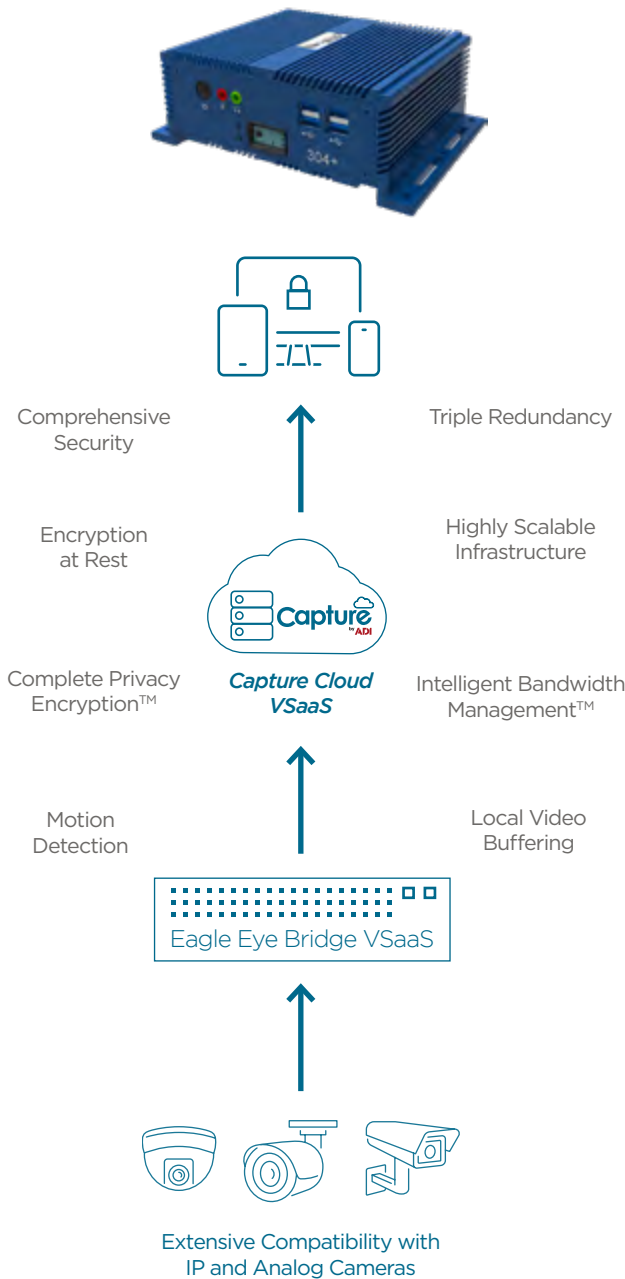

MODEL (R2-SU304PLUS)	Bridge 304+
Max Cameras (4MP)*	20 IP
Max Analytic Count	5
Video Buffer	2 days on-premises
Network Ports	Dual Gigabit
Video Output	HDMI (1), DP (1)
Dimension	180x 127 x 64 mm 7.08 x 5.00 x 2.50 in
Maximum Power Consumption	External 100-240 VAC, 20 W
Operating Temperature Range	-10-50° C 14-122° F
Operating Humidity Range	0-70%
Certifications	FCC, UL, CE, UKCA, PSE, NOM, ACM, RoHS, CTick, WEEE, NDAA

CAPTURE CLOUD BY ADI VSAAS
SUBSCRIPTION PRICING

↓



Recording Features

- Video encrypted in transit and at rest
- Fully cloud managed
- Intelligent Bandwidth Management with local buffering
- Motion or continuous recording
- Optional audio recording

Web Interface / Mobile Features

- Native iOS and Android apps
- View live and recorded video
- Compatible with all modern browsers
- Motion detection with alerts
- Map and floor plan display

System Administration

- 100% browser-based; no software
- Granular user permissions
- Multi-site support
- Point and click video sharing
- Centralized management

Network Features

- Automatic network configuration
- Secure camera network (dual network ports)
- No inbound connections needed
- Packet loss detection/reporting
- Network disconnected alerts

Management Features

- Remote management
- Automatic camera discovery
- Automatic camera configuration
- Advanced motion detection
- Local video buffering
- Configuration synced to Cloud
- Camera trouble alerts
- Internet outage alerts
- Fully cloud managed

Analytics

Intrusion Detection

- Detects when an object enters a customer defined area
- Generates notification when an object enters that forbidden area

Line Crossing

- Detects when an object crosses a virtual line
- Direction may be specified
- Generates notifications when a security boundary is crossed

Loitering

- Used to generate an alert when a moving object remains in a pre-defined area for a specific amount of time

Object Counting

- Counts how many objects cross a line in either direction
- Total count per day, per direction, and current delta of the count are maintained and displayed

Tampering

- Sends an alert if someone blocks or damages the cameras view

Object counting analytics are available at an additional charge per camera per month. All other analytics are included as part of the standard license.

FOR MORE INFORMATION

DOWNLOAD OUR
CAPTURE CLOUD BY ADI
BROCHURE



STANDARD SUPPORT

- Free of charge with an active subscription
- Warranty - 2 years
- 24/7 phone, email and web support

Connect Any Camera to the Capture Cloud VSaaS



3rd Party IP Cameras
Onvif Profile S



PoE Switch



Capture IP Cameras
Onvif Profile S



PoE Switch



Any Brand



HD Analog Cameras
Onvif Profile S




3rd Party Encoder




FOR MORE INFORMATION
CONTACT YOUR ADI SALES PERSON

Capture
by ADI
Cloud Service



PoE Switch



WARRANTY 3 YEARS

ONVIF®



DAY & NIGHT

Day and night vision cameras automatically adjust from full colour footage during the daytime, to black and white footage at night time, or in situations where there is minimal to no ambient lighting.



5MP IP

5MP with a resolution of 2608x1960 pixels. This provides a crisp image.



BUILT IN MIC

Allows simultaneous video and audio streaming over the network to an NVR or computer.



POE / 12VDC

Each camera has PO and 12VDC power options. The POE functionality allows simple Plug and Play to the Capture by ADI range of NVR's.



CAP5P



R4052A



IP66

IP66

IP66 offers a high level of protection against dust and moisture. IP66 rated cameras can be installed outdoors without worrying about damage from the elements.



SD CARD SLOT

Supports up to 256GB Micro SD/ SDHC/ SDXC for circular recording locally.

30M
IR

30M IR

Built in IR (infrared) LED's for high quality night time video surveillance footage.



APPLICATIONS

This camera is an ideal choice for a number of applications, from commercial installations to residential use.

MADE IN TAIWAN

Capture

by ADI

The Capture by ADI range includes all components to create a secure surveillance solution.

Choose between fixed lens, varifocal lens or motorized zoom cameras, along with NVRs to fit all installation sizes - with 4, 8 or 16 channel models available.

WARRANTY 3 YEARS

**NDA**
COMPLIANT





Fixed Lens



CAP5R4052A
5MP Turret IP Camera

- 2.8mm, 30M IR
- Built in MIC
- SD Card Slot



CAP5R9152A
5MP Bullet IP Camera

- 2.8mm, 30M IR
- Built in MIC
- SD Card Slot

LIMITED LIFETIME

Combine for a simple pole mount solution.

**CAPETD01W**
Weatherproof Back Box


**CAPETD03W**
Weatherproof Back Box

**CAPBTD04W**
L Shaped Wall Bracket

**CAPBCR05W**
Weatherproof Back Box

**CAPBCR07W**
Weatherproof Back Box

**CAPBTR08W**
Pole Mount Adaptor for BTD04W

**CAPETD09W**
Weatherproof Back Box

Varifocal Lens



CAP5R9252AX

5MP Bullet IP Camera

- 2.8-12mm, 45M IR
- 2 Way Audio Path
- Additional MIC & speaker required
- SD Card Slot



CAP5R4152AX

5MP Turret IP Camera

- 2.8-12mm, 45M IR
- 2 Way Audio Path
- Additional MIC & speaker required
- SD Card Slot



CAP5R4252AX

5MP Dome IP Camera

- 2.8-12mm, 45M IR
- 2 Way Audio Path
- Additional MIC & speaker required
- SD Card Slot

Motorized Zoom Lens



CAP5R6552X

5MP Turret IP Camera

- 2.8-8mm, 30M IR
- Auto Zoom / Focus



CAP5R6452X3

5MP Dome IP Camera

- 2.8-12mm, 30M IR
- Auto Zoom / Focus
- SD Card Slot




CAP5R8952X3

5MP Bullet IP Camera

- 2.8-12mm, 30M IR
- Auto Zoom / Focus
- SD Card Slot

WARRANTY 3 YEARS

Our PoE integrated NVRs provide a cost effective and convenient solution for installations - with both recording and power facilities housed in one unit eliminating the need for additional PoE switches.



CAPNVR3104E

NVR 4 Channel PoE NVR

- 4 channel, 4 PoE
- Max 10TB HDD
- 120FPS
- 65W

CAPNVR3108E

NVR 8 Channel PoE NVR

- 8 channel, 8 PoE
- Max 10TB HDD
- 240FPS
- 96W

CAPNVR3116E

NVR 16 Channel PoE NVR

- 16 channel, 16 PoE
- Max 10TB HDD
- 480FPS
- 195W



Full HD LED CCTV Monitors

Experience Full HD CCTV
security monitoring.

All Capture monitors come with
3 years manufacturers warranty as
standard.

WARRANTY 3 YEARS



CAP-22VGHDMI3-P

22" HDMI VGA Frameless Monitor

- 21.5" 1920 x 1080P Full HD resolution
- Designed specifically for 24/7 monitoring
- 178° Ultra-wide viewing angle
- Source auto detection
- Low blue light technology
- HDMI, VGA & Audio inputs
- Weight: 2.2kg



CAP-24VGHDMI3-P

24" HDMI VGA Frameless Monitor

- 23.8" 1920 x 1080p Full HD Resolution
- Designed specifically for 24/7 monitoring
- 178° Ultra-wide viewing angle
- Source auto detection
- Low blue light technology
- HDMI, VGA & Audio inputs
- Weight: 2.2kg



CAP-27VGHDMI3-P

27" HDMI VGA Frameless Monitor

- 27" 1920 x 1080p Full HD Resolution
- Designed specifically for 24/7 monitoring
- 178° Ultra-wide viewing angle
- Source auto detection
- Low blue light technology
- HDMI, VGA & Audio inputs
- Weight: 2.2kg



WBXMP19

18.5" HD LED Monitor

- 18.5" HD ELED screen
- 1366 x 768 screen resolution
- Designed specifically for 24/7 monitoring
- HDMI, VGA & Audio Inputs
- Weight: 2.6kg



WBXMP22

21.5" HD LED Monitor

- 21.5" HD ELED screen
- 1920 x 1080 screen resolution
- Designed specifically for 24/7 monitoring
- HDMI, VGA & Audio Inputs
- Weight 3.6kg



WBXML20

19.5" Full HD LED Monitor

- 19.5" HD ELED screen
- 1920 x 1080P screen resolution
- Designed specifically for 24/7 monitoring
- BNC, HDMI, VGA & Audio inputs
- Weight 2.8kg



WBXML22

21.5" Full HD LED Monitor

- 21.5" HD ELED screen
- 1920 x 1080P screen resolution
- Designed specifically for 24/7 monitoring
- BNC, HDMI, VGA & Audio inputs
- Weight 3.4kg



WBXML24

23.5" Full HD LED Monitor

- 23.5" HD ELED screen
- 1920 x 1080P screen resolution
- Designed specifically for 24/7 monitoring
- BNC, HDMI, VGA & Audio inputs
- Weight 4kg



WBXML32

32" Full HD LED Monitor

- 31.5" HD ELED screen
- 1920 x 1080P screen resolution
- Designed specifically for 24/7 monitoring
- BNC, HDMI, VGA & Audio inputs
- Weight 10.3kg



4K UHD CCTV Monitors

Experience True 4K
CCTV security monitoring

All Capture monitors come with
3 years manufacturers warranty
as standard.

WARRANTY 3 YEARS



WBXML4K28

4K 28" LED Monitor

- 28.5" 4K UHD ELED screen
- 3840 x 2160 screen resolution
- Designed specifically for 24/7 monitoring
- HDMI, USB, VGA, DVI, BNC & Audio Inputs
- Weight 8.7kg



WBXML4K43

4K 43" LED Monitor

- 43" UHD 4K LED screen
- 3840 x 2160 screen resolution
- Designed specifically for 24/7 monitoring
- HDMI, USB, VGA, DVI, BNC & Audio Inputs
- Weight 11kg



WBXML4K49

4K 49" LED Monitor

- 49" UHD 4K LED screen
- 3840 x 2160 screen resolution
- Designed specifically for 24/7 monitoring
- HDMI, USB, VGA, DVI, BNC & Audio Inputs
- Weight 14.5kg



WBXML4K55

4K 55" LED Monitor

- 55" UHD 4K LED screen
- 3840 x 2160 screen resolution
- Designed specifically for 24/7 monitoring
- HDMI, USB, VGA, DVI, BNC & Audio Inputs
- Weight 19.2kg



Test Monitor

WBXMLTEST

- Supports Analogue IPC(H.264/ H.265/ 4K), AHD 3.0, TVI 3.0,CVI 3.0 Camera
- Step by step IPC test, quickly locate failure
- ONVIF highly compatible
- Ergonomic design, single hand operation
- Real time operation prompt
- 12V/1A power output
- Dual 100M network port, capable of detecting packet lost, monitoring network flow
- TDR RJ45 Cable Test
- 4.0 inch all viewing angle display, 800X480 resolution, 16.7M colour
- Swing keyboard input, QWERTY
- Changeable Li-polymer battery; battery working time 5 hours
- Rubberised Protective Casing
- Dual LED torch

WARRANTY 1 YEAR

WBXMLTBAT

Spare Battery for Test Monitor WBXMLTEST



Capture
by ADI

WARRANTY 3 YEARS



0E-32MON720P-UK

Semi Commercial Display

- 32" Display
- HD Panel
- Max Resolution 1366x768
- Luminance: 400cd/m²



0E-43MON1080-UK

Semi Commercial Display

- 43" Display
- FHD Panel
- Max Resolution 1920x1080
- Luminance: 500cd/m²

AVARRO™

LIMITED LIFETIME

HDMI Cables - 4K 30Hz

HDMI V1.4 Cables suitable for Capture by ADI
24/7 security monitors



Interconnect HDMI high speed cable

- HDMI to HDMI cable
- V1.4, 30AWG, 4K, 30Hz
- Gold plated
- Black

WBXHDMI01 1m

WBXHDMI02 2m

WBXHDMI03 3m

WBXHDMI05 5m

WBXHDMI10 10m

HDMI Cables - 4K 60Hz UHD

HDMI V2.0 Cables suitable for Capture by ADI
24/7 security monitors



Interconnect HDMI high speed cable

- HDMI to HDMI cable
- V2.0, 30AWG, 4K, 60Hz, UHD
- Gold plated
- Black

WBXHDMI01V2 1m

WBXHDMI02V2 2m

WBXHDMI03V2 3m

WBXHDMI05V2 5m

WBXHDMI10V2 10m

WBXHDMI15V2 15m

LIMITED LIFETIME

WBXMB1330TM

Monitor Tilt Bracket

- Wall mount monitor bracket
- Tilt only action
- Tilt: 0 to -12 degree
- Vesa mount: 75x75 & 100x100mm
- Load capacity: 15kg (max)
- Black



WBXMB1342TSD

Monitor Bracket Double Swivel & Double Tilt

- Wall mount monitor bracket
- Double arm tilt and swivel
- Tilt: +15 to -15 degree
- Vesa mount: 200x200mm (Max)
- Load capacity: 25kg (Max)
- Black



WBXMB3265TM

Monitor Bracket Tilt

- Wall mount monitor bracket
- Monitor size Up to 65"
- Tilt: +8 to -12 degree
- Vesa mount: 400x400mm (Max)
- Load capacity: 50 kg (Max)
- Black



WBXMB1332TSS

Monitor Bracket Single Swivel & Tilt

- Wall mount monitor bracket
- Single arm tilt and swivel
- Tilt: +15 to -15 degree
- Vesa mount: 200x200mm (Max)
- Load capacity: 25kg (Max)
- Black



AVARRO™

AV Solutions
Designed for Pros

AVARRO provides AV solutions engineered for the toughest applications and with superior quality for residential and commercial installs.



AVARRO™



WARRANTY 3 YEARS



LIMITED LIFETIME



WARRANTY 3 YEARS

WBXUSBE1

100m USB Extender

- Provides support for any full-speed (12 Mb/s) or low-speed (1.5 Mb/s) USB device
- Downstream connector: Female, Type “B”, USB approved connector
- Up stream connector: Male, Type “A”, USB approved connect.

WBXDPHDMI4

Display port to HDMI Converter

- Support display port 1.1a/1.2 input, HDMI 1.3b/1.4b output and compatible with Thunderbolt input port
- Support 3D HDMI supports audio output
- Compatible with HDTV, display, monitor, projector and the other peripherals with HDMI interface

WBXHDME6IR

60m HDMI Extender

- Supports 3D
- Supports 8/10/12 bit colour depth
- Supports AWG26 HDMI standard cable, input 15m, output 20m



HDMI Splitter

- Supports 3D video format
- HDR 4K*2K
- HDMI 1.4 HDCP1.4
- RGB format

WBXHDMIS2 x2 HDMI Output

WBXHDMIS4 x4 HDMI Output



Allows two cameras or network devices to operate on a single CAT 5 or 6 Wire



ADI-POE-MP2

PoE Cat5 & 6 Mulltiplexer

- Easy installation, plug and play
- 100m transmission distance
- CAT 5 or 6 cable compatible
- Does not require PSU or POE injector
- Transmits video, 485 or audio

WARRANTY 1 YEAR



Professional Quality Products Without Compromise

ADI PRO is an exclusive brand offering a broad range of products in wire, cabling solutions and tools and hardware.



Professional, Reliable, Great Value

ADI PRO delivers professional, quality products and exceptional value without compromise

Our Commitment to You

Fully tested, fully stocked and backed by a competitive warranty, ADI PRO's exclusive products meet or exceed industry standards

Construction Products
Regulation (CPR) Euro Classes

Most cables designed for permanent installation within domestic, residential and commercial buildings are subject to the Construction Products Regulation (CPR).

Designed to help save lives and protect buildings, the regulation defines safety performance requirements in fires and classifies products into one of seven Euro Class levels - shown opposite. These classes have fire performance assessment processes based on BS EN 60332-1-2, BS EN 50399 and BS EN ISO 1716. Even though the regulation classifies products into one of seven Euro Classes, in most instances only five will apply to cables. The majority will fall between classes B2ca to Eca.

This became a requirement in 2017 so it's important to understand how to stay compliant.

Who is Responsible?

Each party throughout the supply chain from manufacturer to end user has a responsibility to ensure CPR compliance.

Specifiers and installers need to ensure the cables they select are appropriate for the fire risks in the building or applications and any contractual terms.

The CPR covers the way in which product is placed on the market. Crucially, it does not say what class of product should be used in any given circumstance.

Reaction to Fire BS EN ISO 1716

Example Environments

Aca
Euro Class

- No reaction to fire
- Does not contribute to fire propagation / heat emission

It will be almost impossible for a cable to meet Class Aca and due to availability, they should only be specified with extreme caution.

Reaction to Fire BS EN 50399

Example Environments

B1ca
Euro Class

- Very low reaction
- Minimum contribution to fire propagation/ heat emission

It's very unlikely that commonly used cables will be classified to Class B1ca

B2ca
Euro Class

- Low reaction
- Combustible, low flame spread & heat release contribution to the fire

Hospitals & airports, public buildings with high density of people

Cca
Euro Class

- Reduced reaction
- Combustible, moderate flame spread & heat release

Public buildings, hotels, schools or office buildings with medium density of people

Dca
Euro Class

- Improved reaction
- Combustible, moderate flame spread & heat release

Minimal cable requirement for general installation in some areas

Reaction to Fire BS EN 60332 1-2

Example Environments

Eca
Euro Class

- Basic reaction
- Combustible, limited fire spread of less than 425mm

Minimal cable requirement for general installation in some areas

Fca
Euro Class


- Undetermined
- Combustible, may have high levels of flammability more than 425mm

More likely to be used in external applications

Classes A to E have to be tested by an independent authorised laboratory. Most cables will fall into classes B2ca to Eca. Fca cables are untested. Cables with Fca ratings are mostly intended for external installations.



WARRANTY 10 YEARS



Intrusion Alarm Wire

- PVC
- Type 2
- 100m
- White

ADI-6CT2PVCWH100 6 core

ADI-8CT2PVCWH100 8 core

ADI-12CT2PVCWH100 12 core




Intrusion Alarm Wire

- LSZH
- Type 1
- 100m
- White

ADI-6CT1LSZHHWH100 6 core

ADI-8CT1LSZHHWH100 8 core

ADI-12CT1LSZHHWH100 12 core



Intrusion Alarm Wire

- PVC
- Type 3
- 100m
- White

ADI-8CT3PVCWH100 8 core



Intrusion Alarm Wire

- LSF
- Type 3
- 100m
- White

ADI-8CT3LSFWH100 8 core

Fire Wire



Enhanced Fire Alarm Wire

- 2 Core
- 1.5mm (Solid Bare Copper)
- Rated Voltage 300/500V
- FR 120 minutes
- CPR: LPCB
- UV LSZH
- Rated Temperature -30°C to +70°C



FC2C1.5FR120ENHR1 100m Red

FC2C1.5FR120ENHR2 200m Red

FC2C1.5FR120ENHW1 100m White

FC2C1.5FR120ENHW2 200m White

WARRANTY 10 YEARS

ADI PRO			Category	CPR Classification (Euro Class) Reaction to Fire	Screening	Sheeth Material	Sheeth Colour	Length
UTP Cable Fca	Reaction to Fire BS EN 60332 1-2							
	ADIC5UTPPEBLK305	Cat5E UTP Cable	5E	Fca	UTP	PE	Black	305m
	ADIC6UTPPEBLK305	Cat6 UTP Cable	6	Fca	UTP	PE	Black	305m
UTP Cable Eca	Reaction to Fire BS EN 60332 1-2							
	ADIC5UTPPVCGRY305	Cat5E UTP Cable	5E	Eca	UTP	PVC	Grey	305m
	ADIC6UTPPVCGRY305	Cat6 UTP Cable	6	Eca	UTP	PVC	Grey	305m
	ADIC5UTPLSZHPUR305	Cat5E UTP Cable	5E	Eca	UTP	LSZH	Purple	305m
	ADIC6UTPLSZHPUR305	Cat6 UTP Cable	6	Eca	UTP	LSZH	Purple	305m
UTP Cable Dca	Reaction to Fire BS EN 50399							
	ADIC5UTPDCA2PUR305	Cat5e UTP Cable	5E	Dca s2,a2,d2	UTP	LSZH	Purple	305m
	ADIC6UTPDCA2PUR305	Cat6 UTP Cable	6	Dca s2,a2,d2	UTP	LSZH	Purple	305m
U/FTP Cable Dca	Reaction to Fire BS EN 50399							
	ADIC6AUFTPLSZHB305	Cat 6A U/FTP Cable	6A	Dca s1, a1, d2	U/FTP	LSZH	Ice Blue	305m
UTP Cable Cca	Reaction to Fire BS EN 50399							
	NEW ADIC6UTLSZHCCAP305	Cat6 UTP Cable	6	Cca-s:1a -a:1 -d:1	UTP	LSZH	Purple	305m
FTP Cable Cca	Reaction to Fire BS EN 50399							
	NEW ADIC6FTLSZHCCAP305	Cat6 FTP Cable	6	Cca-s:1a -a:1 -d:1	FTP	LSZH	Purple	305m
UTP Cable B2ca	Reaction to Fire BS EN 50399							
	NEW ADIC5UTLSZHB2P305	Cat5e UTP Cable	5E	B2ca-s:1a -a:1 -d:1	UTP	LSZH	Purple	305m
	NEW ADIC6UTLSZHB2W305	Cat6 UTP Cable	6	B2ca-s:1a -a:1 -d:1	UTP	LSZH	White	305m
	NEW ADIC6UTLSZHB2P305	Cat6 UTP Cable	6	B2ca-s:1a -a:1 -d:1	UTP	LSZH	Purple	305m
	NEW ADIC6UTLSZHB2GN305	Cat6 UTP Cable	6	B2ca-s:1a -a:1 -d:1	UTP	LSZH	Green	305m
	NEW ADIC6UTLSZHB2OR305	Cat6 UTP Cable	6	B2ca-s:1a -a:1 -d:1	UTP	LSZH	Orange	305m
FTP Cable B2ca	Reaction to Fire BS EN 50399							
	NEW ADIC6FTLSZHB2P305	Cat6 FTP Cable	6	B2ca-s:1a -a:1 -d:1	FTP	LSZH	Purple	305m
U/FTP Cable B2ca	Reaction to Fire BS EN 50399							
	NEW ADIC6AUFTLSB2IB305	Cat6A U/FTP Cable	6A	B2ca-s:1a -a:1 -d:1	U/FTP	LSZH	Ice Blue	305m



WARRANTY 2 YEARS



Patch Panel

- Current rating: 1.5Amp
- Insulation resistance: $\geq 500\text{M}\Omega$
- Contact resistance: $\leq 10\text{M}\Omega$
- Dimensions: 482 x 45 x 133mm

ADI-PP-C5E-24-180	Cat5e
ADI-PP-C6-24-180	Cat6



Wall Mount Cabinet

- 6U wall mount
- Load capacity 50kg
- Lockable and removable steel panels

ADI-WM-6U-450	W600 x D450mm
ADI-WM-6U-560	W600 x D560mm



Wall Mount Cabinet

- 9U wall mount
- Load capacity 50kg
- Lockable and removable steel panels

ADI-WM-9U-450	W600 x D450mm
ADI-WM-9U-560	W600 x D560mm



ADI-RM-PDU-6-UK

6 Way PDU

- 1U
- 6 x UK power sockets
- 1.8m power cord
- Neon On/Off rocker switch
- BSI standard UK power plug 13A BSI fuse



ADI-WM-FAN-2-UK

Rack Fan Tray

- 1U
- 2 x fan units
- Thermostat controlled
- Pre-wired
- Reduced noise output



ADI-WC-CN-50

Cage Nuts with Washers & Bolts

- 50 Pack



ADI-WC-S-1U-350

19" Rack Mount Shelf

- 350mm Deep
- Black



ADI-WC-S-1U-400

19" Rack Mount Shelf

- 400mm Deep
- Black



ADI-C5E-C6-MOD-2

Module

- Cat5e & Cat6 compatible
- Current rating: 1.5Amp
- Insulation resistance: $\geq 500\text{M}\Omega$
- Contact resistance: $\leq 10\text{M}\Omega$
- Contact compatibility: 26 to 23 AWG solid
- Dimensions: 50 x 25mm

CAT5e Cables 0.5m - 5m

LIMITED LIFETIME



Cat5e RJ45 Patch Cable

- Cat5e
- RJ45 patch cable
- Colour: Grey
- Anti-Snag

WBXC5EGY0.5MP5	0.5m Pack of 5
WBXC5EGY1MP5	1m Pack of 5
WBXC5EGY2MP5	2m Pack of 5
WBXC5EGY3MP1	3m Single
WBXC5EGY5MP1	5m Single
WBXC5EGY10MP1	10m Single
WBXC5EGY15MP1	15m Single



Cat5e RJ45 Patch Cable

- Cat5e
- RJ45 patch cable
- Colour: Blue
- Anti-Snag

WBXC5EBL0.5MP5	0.5m Pack of 5
WBXC5EBL1MP5	1m Pack of 5
WBXC5EBL2MP5	2m Pack of 5
WBXC5EBL3MP1	3m Single
WBXC5EBL5MP1	5m Single
WBXC5EBL10MP1	10m Single
WBXC5EBL15MP1	15m Single



Cat5e RJ45 Patch Cable

- Cat5e
- RJ45 patch cable
- Colour: Red
- Anti-Snag

WBXC5ERD0.5MP5	0.5m Pack of 5
WBXC5ERD1MP5	1m Pack of 5
WBXC5ERD2MP5	2m Pack of 5
WBXC5ERD3MP1	3m Single
WBXC5ERD5MP1	5m Single
WBXC5ERD10MP1	10m Single
WBXC5ERD15MP1	15m Single



Professional Quality Products
Without Compromise

WBXRG59B1

RG59 CU 100m Drum

- RG59
- 100m drum
- Black


LIMITED LIFETIME



WBXRG59100M2C

RG59 Shotgun CU 100m Drum

- RG59
- + 2 core for low voltage
- 100m drum
- Black



See pages 30 - 31 for wire
accessories and tools



CAT6 Cables 0.5m - 5m

LIMITED LIFETIME



Cat6 RJ45 Patch Cable

- Cat6
- RJ45 patch cable
- Colour: Grey
- Anti-Snag

WBXC6EGY0.5MP5	0.5m Pack of 5
WBXC6EGY1MP5	1m Pack of 5
WBXC6EGY2MP5	2m Pack of 5
WBXC6EGY3MP1	3m Single
WBXC6EGY5MP1	5m Single
WBXC6EGY10MP1	10m Single
WBXC6EGY15MP1	15m Single



Cat6 RJ45 Patch Cable

- Cat6
- RJ45 patch cable
- Colour: Blue
- Anti-Snag

WBXC6EBL0.5MP5	0.5m Pack of 5
WBXC6EBL1MP5	1m Pack of 5
WBXC6EBL2MP5	2m Pack of 5
WBXC6EBL3MP1	3m Single
WBXC6EBL5MP1	5m Single
WBXC6EBL10MP1	10m Single
WBXC6EBL15MP1	15m Single



Cat6 RJ45 Patch Cable

- Cat6
- RJ45 patch cable
- Colour: Red
- Anti-Snag

WBXC6ERD0.5MP5	0.5m Pack of 5
WBXC6ERD1MP5	1m Pack of 5
WBXC6ERD2MP5	2m Pack of 5
WBXC6ERD3MP1	3m Single
WBXC6ERD5MP1	5m Single
WBXC6ERD10MP1	10m Single
WBXC6ERD15MP1	15m Single



Single/Double Gang Face Plate

- 1 Pack
- Quality engineering plastic

ADI-FP-S-1
87 x 87 x 9mm
ADI-FP-D-1
140 x 87 x 9mm



ADI-HALF-BLNK-5
Quarter Blanking Plate

- 5 Pack
- 50 x 25 x 13.5mm
- High quality engineering plastic



ADI-QTR-BLNK-10
Half Blanking Plate

- 10 Pack
- 50 x 12.5 x 13.5mm
- High quality engineering plastic



BNC Crimp Connector

- RG59 BNC male crimp connector

WBXBNCM59P10 10 Pack

WBXBNCM59P50 50 Pack

LIMITED LIFETIME



WBXBNC59SRP10

BNC Strain Boot 10 Pack

- RG59 BNC strain boot
- 10 pack
- Black

LIMITED LIFETIME



WBXBNC59TOOL

BNC Insertion and Extraction Tool

- BNC Removal / Insertion
- Long Reach

LIMITED LIFETIME



WBXRG59STIP

RG59 3 Blade Wire Stripper

- Coaxial cable stripper
- For RG58/RG59/RG6
- 3 blades

WARRANTY 1 YEAR

ADI DIGITAL BRANCH



Your 24/7 Shopping Experience
for Market Leading Security, Fire
and AV Products

Our digital branch allows you to order any
time day or night, explore products and
brands and get hourly stock availability
information at your fingertips.

Sign up for an online account today
www.adiglobal.com/uk



WARRANTY 1 YEAR

WBXCATBTES

RJ45 Tester

- 2 Piece set
- Check continuity of RJ11& RJ45 cable quickly
- LED status display
- Slow and fast test switch
- Simple to use



WBXRJ45CRIMP

RJ45 Crimp Tool

- RJ crimp tool
- RJ45/RJ12/RJ11
- With cable cutter & stripper



WBXBNCM22FTP10

BNC T M-F 10 Pack

- RG59 BNC male - female
T piece connector
- 10 pack



RJ45 Crimp connector

- Suitable for Cat5e cable

WBXC5ERJ45P10 Pack of 10

WBXC5ERJ45P100 Pack of 100

- Suitable for Cat6 cable

WBXC6ERJ45P10 Pack of 10

WBXC6ERJ45P100 Pack of 100

LIMITED LIFETIME



RJ45 Connector Rapid Fit

- Suitable for Cat5e cable

WBXC5ERAPID10 Pack of 10

WBXC5ERAPID100 Pack of 100

- Suitable for Cat6 cable

WBXC6ERAPID10 Pack of 10

WBXC6ERAPID100 Pack of 100



RJ45 CAT5/6 Strain Boots

- RJ45 strain boot
- Cat5e/Cat6

WBXCATSBP10 Pack of 10

WBXCATSBP100 Pack of 100



WBXCATCOUP

RJ45 CAT5/6 Coupler Each

- RJ45 coupler
- Cat5e & Cat6



WBXBNCFFCP10

BNC Coupler 10 Pack

- RG59 female - female connector
- 10 pack



WARRANTY 2 YEARS



UT-1220

BATTERY SLA 12V 2.0AH

- T1 Terminal
- L178 x W35 x H66mm
- VdS
- UL94 HB



UT-1232

Battery SLA, 12V, 3.2Ah

- T1 Terminal
- L134 x W67 x H66mm
- UL94 HB



UT-1270

Battery SLA, 12V, 7Ah

- T1 Terminal
- L151 x W65 x H99.5mm
- UL94 HB



UT-12120

Battery SLA, 12V, 12Ah

- T2 Terminal
- L151 x W98 x H101mm
- UL94 HB



UT-121805

Battery SLA, 12V, 18Ah

- M5 Terminal
- L181.5 x W76.5 x H167.5mm
- UL94 HB



IM-CR123A-2PK

CR123A 3V Lithium Battery

- Flame resistant case
- 2 Pack



IM-CR2032

CR2032 3V Lithium Coin Battery – Each

- CR2032 “Lithium Coin” batteries high cell capacity allows for stable high voltage power used with variety of devices. The batteries design provides long-lasting reliable performance



IM-CR2

CR2 3V Lithium Battery - Each

WARRANTY 2 YEARS



UT-1220-FR

**Fire Rated Battery SLA,
12V 2.0h**

- T1 Terminal
- L178 x W35 x H66
- Flame Resistant Case
- UL94 V-0



UT-1232-FR

**Fire Rated Battery SLA,
12V, 3.2Ah**

- T1 Terminal
- L134 x W67 x H66mm
- Flame Resistant Case
- UL94 V-0



UT-1270-FR

**Fire Rated Battery SLA,
12V, 7Ah**

- T1 Terminal
- L151 x W65 x H99.5mm
- Flame Resistant Case
- UL94 V-0



UT-12120-FR

**Fire Rated Battery SLA,
12V, 12Ah**

- T2 Terminal
- L151 x W98 x H101mm
- Flame Resistant Case
- UL94 V-0



UT-121805-FR

**Fire Rated Battery SLA,
12V, 18Ah**

- M5 Terminal
- L181.5 x W76.5 x H167.5mm
- Flame Resistant Case
- UL94 V-0

UltraTech
POWER PRODUCTS
by ADI

Durable and Dependable



UltraTech by ADI batteries and power products can power alarm systems to safeguard any industrial and residential sector

LIMITED LIFETIME



0E-4POE2UPLK

6-Port Fast Ethernet PoE Switch

- 4-Port PoE + 2 Port Uplink
- 10/100 Mbps
- 62W PoE Budget



0E-5PGIGUN

5 Port Gigabit Unmanaged Ethernet Switch

- 5 x 10/100/1000 Mbps
- Easy set-up plug and play
- Switching capacity 10Gbps
- Port status LED indicator



0E-8P4POEGIG

8 Port Fast Gigabit Ethernet PoE Switch

- 4 x 10/100/1000 Mbps PoE ports
- 4 x 10/100/1000 Mbps ports
- Easy set-up plug and play
- 62W PoE budget
- Port status LED indicator



0E-8P65W4POE

8 Port Fast Ethernet PoE Switch

- 4 x 10/100 Mbps ports
- Easy set-up plug and play
- 62W PoE budget
- Port status LED indicator



0E-8PGIGUN

8 Port Gigabit Unmanaged Ethernet Switch

- 8 x 10/100/1000 Mbps
- Easy set-up plug and play
- Switching capacity 10Gbps
- Port status LED indicator



0E-9P8POEGIG

9 Port Fast Gigabit Ethernet PoE Switch

- 8 x 10/100/1000 Mbps PoE ports
- 1 x 10/100/1000 Mbps port
- Easy set-up plug and play
- 130W PoE budget
- Port status LED indicator

WARRANTY 3 YEARS



Perfect for external camera applications. Non battery backed IP rated boxed PSU's.

WARRANTY 3 YEARS



WBXPSU4024IP

External IP Rated Power Supply

- Input: 230VAC/50Hz, 3A fuse
- Output: 1 x 4A or 4 x 1A
- Output voltage: 24VAC
- Operating temperature: -10° C to + 40° C
- PTC fuse: Automatic reset
- IP protection rating IP66
- Weight: 2.8kg
- Dimensions: 27cm x 15cm x 8.9cm

Ideal for small 12vdc camera installations. Spiltter available for inline PSU's with up to 4 outputs.



WBXPSU5012IP

External IP Rated Power Supply

- AC110-230VAC
- Output: 12V DC @ 1 x 5A or 8 x 0.8A
- Auto Reset PTC Fuse
- -10 to +40C
- IP66
- 1.2Kg, Dimensions: 27 x15 x 8.9cm



WBXIL2024-UK

WARRANTY 3 YEARS

Power Inline PSU

- 24V AC
- 2Amp
- UK Plug



WARRANTY 3 YEARS

Power Inline PSU

- Inline power supply
- 12V DC output
- 1.2m DC cable
- 5.5*2.1mm plug

WBXIL10UK

1 Amp

WBXIL20UK

2 Amp

WBXIL35UK

3.5 Amp

WBXIL50UK

5 Amp

UT-IL4024-IP-UK

WARRANTY 3 YEARS

IP Rated Power Inline PSU

- 24V AC
- 4Amp
- IP65 Rated
- UK Plug

WBXPSUSP4

LIMITED LIFETIME

Female DC to 4 way DC Splitter

- DC Plug with 5.5*2.1mm connector
- Black PVC
- Nickel plated

WBXD-MALE

DC Jack Male 10 pack

- 2.1mm connector
- Nickel plated

WBXD-FEMALE

DC Jack Female 10 Pack

- 2.1mm connector
- Nickel plated

WARRANTY 3 YEARS



WARRANTY 3 YEARS



13.8V Switch Mode PSU in Metal Box

Perfect for Intrusion Systems (Non PD:6662 compliant).
Any 12vdc systems requiring battery back up.

- Boxed power supply
- 13.8V DC output
- Tamper (lid & rear)
- Mains, battery, output & fault LED
- Enclosure - 200 x 240 x 75mm
- Battery compartment - 190 x 130 x 70mm

WBXPSU1A12VT	1Amp
--------------	------

WBXPSU2A12VT	2Amp
--------------	------

WBXPSU3A12VT	3Amp
--------------	------

WBXPSU5A12VT	5Amp
--------------	------

5 Amp

- Battery compartment - 350 x 220 x 80mm



24VDC Power Supply Units

Perfect for Fire systems (Non EN54-4 compliant).
Any other 24vdc systems requiring battery back up.

- Input 90 to 264 Vac
- Output: nominal 27.6VDC
- Short circuit overload protection
- Mains transient protection
- Anti-tamper, front and rear
- Back up battery requires 24VDC

WBXPSU1A24VDT	1Amp
---------------	------

WBXPSU2A24VDT	2Amp
---------------	------

WBXPSU3A24VDT	3Amp
---------------	------

WBXPSU5A24VDT	5Amp
---------------	------

WBXPSU10A24VDT	10Amp
----------------	-------



24VDC Transformer Rectifier Power Supply Units

Designed to power 24vdc Door Retainers, with fire alarm input relay control. For use when battery back up is not required.

- Input 90 to 264 Vac
- Output: regulated 24VDC
- Lid tamper protection
- Selectable NO/NC input for relay
- External DC24V voltage input for relay

WBXPSU1A24VDST	1Amp
----------------	------

WBXPSU2A24VDST	2Amp
----------------	------

WBXPSU4A24VDST	4Amp
----------------	------

WARRANTY 3 YEARS

Designed to offer multiple 12Vdc outputs for CCTV installations. Non battery backed boxed PSU's.



WBXPSUC12V5A4

**Power Multi Output PSU
Up to 4 way 5A**

- CCTV Boxed power supply
- Multi output
- Metal enclosure
- Upto 4 way
- Max 5Amp



WBXPSUC12V10A9

**Power Multi Output PSU
Up to 9 way 10A**

- CCTV Boxed power supply
- Multi output
- Metal enclosure
- Upto 9 way
- Max 10Amp



WBXPSUC12V16A16

**Power Multi Output PSU
Up to 16 way 16A**

- CCTV Boxed power supply
- Multi output
- Metal enclosure
- Upto 16 way
- Max 16Amp

Ideal for multiple applications when a mixture of 12 and 24Vdc power is required. Intrusion, access control, general use requiring battery back up.



UT-PSU12-24V4-2A-1

**12/24Vdc Switchable PSU
with Battery Backup**

- 12/24Vdc switchable PSU 4/2 Amp
- Single output
- Tamper switch - front & rear
- Space for 2 x 7AH batteries



UT-PSU12-24V8-4A-1

**12/24Vdc Switchable PSU
with Battery Backup**

- 12/24Vdc switchable PSU 8/4 Amp
- Single output
- Tamper switch - front & rear
- Space for 2 x 7AH batteries



UT-PSU12-24V8-4A-8

**12/24Vdc Switchable PSU
with Battery Backup**

- 12/24Vdc switchable PSU 8/4 Amp
- 8 x 1 amp @ 12Vdc via Fire input Fuse Board
- Tamper switch - front & rear
- Space for 2 x 7AH batteries

WARRANTY 3 YEARS



ADI-RTE-SS-GD

Dome RTE Button

- Surface Mount
- 2A @ 30VDC
- Stainless Steel
- Green Dome
- Single Gang



WBXRTE1

No Touch RTE Switch

- Surface Mount
- 12 - 24VDC
- Stainless Steel
- No Touch
- Single Gang



WBXRTE1

RTE Switch with Back Box

- Surface Mount
- 10A @ 250VAC
- Plastic
- Single Gang
- Single Pole



WBXEGDP

Break Glass Surface

- Resettable
- Green
- Surface Mount
- Double Pole



WBXEGSP

Break Glass Surface

- 8A @ 24VDC
- 5A @ 220VAC
- Resettable
- Green
- Surface Mount
- Single Pole



WBXEGSD-COVER

Cover for WBXEGSP & EGDP



WBXEGKEY

Test and Reset Keys for the WBXEDSP and WBXEGDP

- Pack of 10

NEW
@ ADI



ADI-BGU-TP-G

Break Glass Unit

- Resettable
- Surface Mount
- Triple Pole
- Illuminated
- Flashing & audio on activation

NEW
@ ADI



ADI-BGU-TP-KEY

- Reset Key for ADI-BGU-TP-G

NEW
@ ADI



ADI-BGU-TP-COVER

- Replacement cover for ADI-BGU-TP-G

NEW
@ ADI



ADI-H26-I-N-PK25

Access Card

- 26bit, H10301
- Programmed
- Comparable HID
- 26bit Wiegand
- Printable PVC
- 25-pack

NEW
@ ADI



ADI-H26-F-N-PK25

Access Fob

- 26bit, H10301
- Programmed
- Comparable HID
- 26bit Wiegand
- Material ABS
- 25-pack

UltraTech
POWER PRODUCTS
by ADI

Primarily designed for Paxton & ACT access control systems. Can also be used in conjunction with many other access systems requiring battery back up.



NEW
@ ADI

UT-ACCESS-PSU2

Access Power Supply, upto 2 boards*

- 12VDC; 5Amp
- Footprint for 2 x Paxton or 2 x ACT controllers
- Output voltage: 13.2~13.8vdc (13.8 nominal)
- Battery output voltage: 10.0~13.2vdc
- Tamper: front and rear
- Indicators: battery/mains/door unlocked/fault
- Number of outputs: 4



NEW
@ ADI

UT-ACCESS-PSU-6

Access Power Supply, upto 6 boards*

- Selectable 12 or 24VDC
- 8 or 4Amp
- Footprint for 6 x Paxton or 6 x ACT controllers
- Output in 12v mode: 13.2~14.0vdc (13.8vdc nominal) 8A max
- Output in 24v mode: 27.0~28.0vdc (27.6vdc nominal) 4A max
- Tamper: front and rear
- Indicators: mains and fault
- Number of outputs: 8

*controllers and battery NOT included.



WBX280S
Unmonitored Magnetic Lock
• Surface magnet, unmonitored
• 280Kg, 12/24 VDC Selectable

WARRANTY 3 YEARS



WBX280S-M
Monitored Magnetic Lock
• Surface magnet, monitored
• 280Kg, 12/24 VDC Selectable

WARRANTY 3 YEARS



WBX280AS
Magnet Arm Housing for WBX280

LIMITED LIFETIME



WBX280ZL
Magnet Z & L Bracket
• To Fit WBX280S & WBX280S-M

LIMITED LIFETIME



WBX280S-D-M
Double Magnetic Lock Monitored
• 280Kg holding force
• Surface mount

WARRANTY 3 YEARS




WBX280ZL-D
Double Z&L Bracket for WBX280S-D-M
• Satin anodised aluminium

LIMITED LIFETIME



WBX500S-M
Monitored Magnetic Lock
• 500Kg holding force
• Single magnet
• Surface mount

WARRANTY 3 YEARS



WBX500ZL
Z & L Bracket for WBX500S-M
• Satin anodised aluminium

LIMITED LIFETIME



Door Loop
WBX30DL 30cm
WBX45DL 45cm

LIMITED LIFETIME



WBX280ZL-AH-S
Z & L Bracket
• To suit WBX280 Range of Mag Locks
• Satin anodised aluminium



WBX500AS
Armature Housing to fit WBX500S-M
• Satin anodised aluminium



LIMITED LIFETIME

ADI-ST-ML
Mag Lock Safety Straps
• For 280 & 500 Kg Mag Locks

ADI YOUR WAY

Whether you're on a phone, tablet,
laptop or in person, your ADI order
is at your fingertips



Pick Up in Branch



Order on the ADI App



Order Online



Get Expert Support



Your ADI order at your fingertips

With over 270 brands, 24,000 products and 28 branches, ADI offers the choice to shop online, in branch or call and speak to one of our sales team

www.adiglobal.com/uk • 0161 687 8787 • sales.uk@adiglobal.com

ADI |  **snap one™**



LIMITED LIFETIME

WBXA4DOCR
A4 Document Box Red



WARRANTY 3 YEARS

WBXELB3W
Emergency Lighting 3W
Maintained Bulkhead



WARRANTY 3 YEARS

WBXELES3W
Emergency Lighting Sign
3W Exit Sign IP20



LIMITED LIFETIME



WBXFIRELOGBOOK

Fire Log Book

- 32 pages
- Comprehensive record keeping detail
- Records detail of
 - System design
 - Installation
 - Inspection and maintenance



WBXGLRED10

- Red Glands
- 10 Pack
- Cable $\varnothing$ 6-12mm
- Rating UL94 V-2



WBXSHRED10

- Red Gland Shrouds
- 10 Pack
- Rating UL94 V-2



NEW
@ ADI

ADI-ISO-R-S

**Single Gang Mains
Powered**

- Operating voltage: 100~240 Vac
- Switch contact: double pole (live and negative)
- Fuse rating: 230Vac, F4A
- Switch surge rating: 80A
- Key can be removed in both ON and OFF positions

WARRANTY 3 YEARS



WBXCT200SS

**Stainless Steel Cable Ties
(Pack of 100)**

- Pack of 100
- AISI204 Stainless steel

WBXCT400SS

**Stainless Steel Cable Ties
(Pack of 100)**

- Pack of 100
- AISI204 Stainless steel

WARRANTY 3 YEARS



WBXELTS3WI20
Emergency Lighting IP20
LED Twin Spot 3W



WBXELTS3WI65
Emergency Lighting IP65
LED Twin Spot 3W

LIMITED LIFETIME



WBXCBLI
Back Box Lid, Seal & Screws



WBXFUSEKIT
Intruder Fuse Kit -
18 Fuses x 5



WBXRESKIT
Intruder Resistor Kit
9 Resistors x 30



WBXCBSE
Back Box Galvanised Stop
End, 20mm



WBXCBTB
2-Way Galvanised Back
Box, 20mm



WBXCUB
Galvanised Back Box,
U-Bend, 20mm

Flush Contacts



ADIFC-G1C2-W	Grade 1, Class 2
ADIFC-G1C2-QF-M	Grade 1, Class 2
ADIFC-G2C2-MULTI-W	Grade 2, Class 2
ADIFC-G3C2-MULTI-W	Grade 3, Class 2

Surface Contacts



ADISC-G1C2-W	Grade 1, Class 2
ADISC-G2C2IND-W	Grade 2, Class 2
ADISC-G2C2MULTI-W	Grade 2, Class 2
ADISC-G2C2-W	Grade 2, Class 2
ADISC-G3C2MULTI-W	Grade 3, Class 2
ADISC-G2C2-MSW-W	Grade 2, Class 2
ADISC-G2C2-MULTISM	Grade 2, Class 2
ADISC-G3C2-MULTISM	Grade 3, Class 2

R/S Contacts



ADIRSA-G2C3-0.5M	Grade 2, Class 3
ADIRSA-G2C3-MUL	Grade 2, Class 3
ADIRSA-G3C3-M-0.5M	Grade 3, Class 3
ADIRS-G2C3-0.5M	Grade 2, Class 3
ADIRS-G2C3-1.0M	Grade 2, Class 3
ADIRS-G2C3-MULTI-W	Grade 2, Class 3
ADIRS-G3C3-MUL-1M	Grade 3, Class 3

Junction Box



ADIJB-G3C2-10-W	Grade 3, Class 3
ADIJB-G3-10-W	Grade 3, Class 2
ADIJB-G3C2-20-W	Grade 3, Class 2
ADIJB-G3C2-24-W	Grade 3, Class 2



Panic Button

- Grade 3
- Class 2

ADIPA-G3C2-S Silver

ADIPA-G3C2-W White



ADI-PA-SP-KEY

- Reset Key for ADIPA-GSC2-S & ADIPA-GSC2-W



ADIKS-3C3-BUZ

Surface Exit Switch with Buzzer

- Grade 3
- Class 2
- Lid Anti Tamper
- Anti Tamper Screws & Bit



ADIINT110

Internal Sounder with Strobe and Tamper Protection

- White lens
- Dimensions: 140 x 85 x 32mm



IP65 External Junction Box

- IP65 rating
- Material ABS
- Halogen-Free
- Insulation class II (according to IEC 61140)
- Grey / Ral 7035

LIMITED LIFETIME

WBXJB204	100x100x50mm
WBXJB206	150x110x70mm
WBXJB207	190x140x70mm
WBXJB208	240x190x90mm
WBXJB209	300x220x120mm
WBXJB210	380x300x120mm



WBXLDVR1

Lockable DVR Enclosure

- Secure cabinet, suites DVR or NVR
- External 445 x 404 x 120mm
- Internal 400 x 400 x 91mm
- 6.0kg



WBXBB1G

FUSED SPUR 1 Gang Surface Pattress Back Box

- Surface mount
- To suite WBXFS13A, 86 x 86 x 25mm

LIMITED LIFETIME



WBXFS13A

FUSED SPUR Face Plate 13A

- Non switched fuse spur, flush mount
- 13A Fuse as standard, 86 x 86 x 20mm

WARRANTY 3 YEARS

WBXLDVR2

Cabinet Lockable DVR Enclosure

- Secure Cabinet, Suites DVR or NVR
- External 540 x 510 x 124mm
- Internal 510 x 478 x 103mm
- 7.9kg

LIMITED LIFETIME

WBXLDVRKEY

- Cabinet 2 Replacement Keys
For WBXLDVR 1 & 2



LIMITED LIFETIME



Enclosure M20*1.5 access gland 6-12mm

- 3 or 5 Pack
- Cable ø 6-12mm
- Construction: Nylon 66
- Seal Material: NBR
- Rating UL94 V-2

LIMITED LIFETIME

WBXGL6-12M20P3 Pack of 3

WBXGL6-12M20P5 Pack of 5

LIMITED LIFETIME




EXPANDED
FIRE RANGE

For our full range of fire
products see pages 42 - 43



WBXA4DOCR

Fire Accessory A4 Document
Box Red



WBXA4DOCW

Enclosure Document A4
Document Box White



WBXDCKEY

Enclosure Document Spare
Key A4 Doc Box



Cable Tie 200mm x 4.8mm
(Pack of 100)

- UV protected
- 200 x 4.8mm
- Pack of 100

WBXCT200BK Black

WBXCT200NT Neutral



Cable Tie 300mm x 4.8mm
(Pack of 100)

- UV protected
- 300 x 4.8mm
- Pack of 100

WBXCT300BK Black

WBXCT300NT Neutral



Stainless Steel Cable Ties
(Pack of 100)

- AISI 304 Stainless Steel
- Pack of 100

WBXCT200SS 200x4.6mm

WBXCT400SS 400x4.6mm



LIMITED LIFETIME



WBXSC1.0/25PH
Screwdriver CPLUS
Stubby Phillips Drive



WBXSC2.5/75SLVDE
Screwdriver CPLUS Ins
Slotted Drive



WBXSC4.0/100SLVDE
Screwdriver CPLUS Ins
Slotted Drive



WBXSC6.5/25SL
Screwdriver CPLUS
Stubby Slotted Drive



WBXSCSET7PCVDE
Screwdriver 7 Pc CPLUS
1000v Set Vd



WBX31PCSET
Screwdriver
31 Piece Bit Set



WBXSC3.0/140TESTER
Voltage Tester, 150-250V
Short 3x140mm



WBXCU161VDE
160mm 1000V Diagonal
Cutter (VDE)



WBXADJPL250VDE
250mm 1000V Water
Pump Pliers



WBXLN160VDE
160mm 1000V Long Nose
Pliers (VDE)



WBXPL180VDE
180mm 1000V
Combination Pliers (VDE)



WBXHEX6PC
6 Piece Foldup Hexagon
Key Set

LIMITED LIFETIME



WBXHEX7PCL
7 Piece Ball End Hex L
Key Set Long Arm



WBXKSNAP-KNIFE18
C-Pro Snap-Off Knife
- 18 mm



WBXSAFETY-KNIFE
Safety Trimming Knife
(Trapezoid Blade)



J47-R
Trapezoid Trimming Knife
Blade - 10pc



WBXHACKSAW260
Mini Hacksaw- 260 mm



WBXHACKSAW430
Hacksaw in-Handle Fixing
System 430 mm



WBXSAW160
Wallboard Saw
(160 mm Cutting Mouth)



J36-R
Mini Hacksaw Blades,
for J36-150) 10 PC



J35-18B
Hacksaw Blades HSS
Bi-Metal-18TPI 10 PC



WBXTAPE5M
Tape Measure,
Inch/Metric 5M-16ft

WARRANTY 1 YEAR



WBXAC-DETECTOR
Non-Cont AC Voltage
Detector max. 1000V

WARRANTY 1 YEAR



WBXBNCRIMP
RG59 Crimp Tool



WBXFUSEKIT

**Intruder Fuse Kit -
18 Fuses X 5**



WBXRESKIT

**Intruder Resistor Kit
9 Resistors X 30**



WBXRJ45CRIMP

RJ45 Crimp Tool

- RJ45/RJ12/RJ11
- With cable cutter & stripper



WBXVHLR1224

Multi Purpose Relay 8A 12/24V

- Board Only
- 12 / 24V operation
- Multi purpose



WBXTAPEW

Tape PVC 19mm x 20m

- Insulation tape
- 1pc
- White



ADI-8A-GEL-OR

IP Rated Crimp Connector


- IP Rated+
- Orange
- 19-26AWG
- 100 Pack



ADI-FDB-4

4 Way Fused Distribution Board


- 12/24V operation
- PTC fuse or glass fuses option



ADI-FDB-9

9 Way Fused Distribution Board

- 12/24V operation
- PTC fuse or glass fuses option

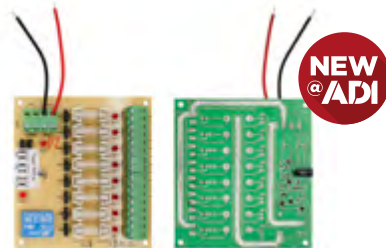

ADI-FDB-8-FR

8 Way Fused Distribution Board

- 12/24V operation
- With fire input relay

LIMITED LIFETIME



WBXHDBP1

HD Video Balun, Dual Pack 1 X PIG 1 X STD No Surge 5 MP

- 720/960P/1080P, 3MP/4MP/5MP
- HD-CVI/AHD/TVI/CVBS
- Pack: pair



WBXHDBPV1

HD Video Balun

- UTP
- Power & video
- Up to 200m
- 12V Dc



WBXHDPOCB1

HD Video Balun with Power over Coax

- Power over coax
- TVI, CVI, AHD & CVBS
- 4k resolution



WBXGLIHD

HD Ground Loop Isolator

- Compatible with all HD-TVI, HD-CVI, AHD & CVBS analog cameras
- BNC male to BNC female with mini 20cm RG 59 coaxial pigtail lead on both sides.
- Passive, no power supply required
- Prevents video-signal distortion caused by video ground loops

WARRANTY 3 YEARS



WBXLDVR1

Lockable DVR Enclosure

- Secure cabinet
- Suites DVR or NVR
- External 445 x 404 x 120mm
- Internal 400 x 400 x 91mm
- 6.0kg



WBXLDVR2

Lockable DVR Enclosure

- Secure cabinet
- Suites DVR or NVR
- External 540 x 510 x 124mm
- Internal 510 x 478 x 103mm
- 7.9g



WBXLDVRKEY

- Spare key
- Pack of 2

Our comprehensive suite of value-added services is designed to make installations easier

Our comprehensive suite of value-added services is designed to make installations easier



1000+



1000+



100+



50+



50+

Site Surveys



Contact our project team today

Our experienced, fully accredited Technical Support team can support any install from large to small

0161 687 8789 • ProjectTeam.UK@adiglobal.com





Call

Tech Support: +44 (0) 161 687 8789
UK Sales: +44 (0) 161 687 8787
IE Sales: +353 (0) 1 450 1366



Click

www.adiglobal.com/uk
www.adiglobal.ie
UK: sales.uk@adiglobal.com
IE: dublin.ie@adiglobal.com



Collect

28 Stores across UK & Ireland
Order by 5pm for next day delivery



Download the ADI app Easy, fast access to products and account information

